HSW-4000 Series WIFI Meagapixels Medium IR Speed Dome Camera

Key Feature

* Beyond the night vision effect, at the effective distance is 60 Meters;
* All standard on P2P cloud monitoring department;
* Support 18 optical variable times, support the entire focus;
* Strong compatibility, support the ONVIF standards;
* Seamless docking Hikvision, dahua, male CMS, days of vision UC2 Platforms such as AEVISION, Milestone and so on;
* support RTSP real-time streaming protocol
* supports H.265 mjpeg compression, three stream, support the video output
* good code flow control, high quality, low stream time delay is less than 200 ms
* double system backup, since failure recovery, support A - B, cruise, etc;
* support 6 kv lightning surge protection, hardware and strong
* original PWM infrared light technology, uniform brightness, low calorific value, The service life of infrared lamp is extended more than 3 times;
* Applicable scenarios: reservoirs, national power systems, tunnels Farm, forest fire, fast track, etc

Product Photo

Model Number

HSW-THS-4018	2MP 18X Medium Speed
HSW-THF-4018	5MP 18X Medium Speed

Physical Dimension

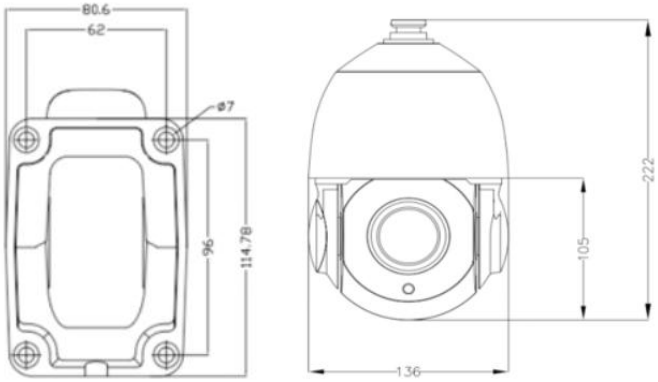

P2P Android Download Address

P2P IOS Download Address

Specification

Model Number	HSW-THS-4018	HSW-THF-4018
Chipset	Hi3516EV200+IMX307	Hi3516EV300+IMX335
Megapixels	2.0MP	5.0MP
Resolution	1080P/30FPS 1080P/25FPS	2592x1944/25FPS 2592x1520/25FPS
Signal	IP(H.265+)	IP(H.265+)
Power Supply	DC 12V 2A	
Operating temperature	-40℃～+60℃	
Consumption	≤25W	
Rotation Range	Medium Speed:Pan:0~360°,Tilt:0~93°;	
Medium Speed	Pan:0~60°/s, Tilt:0~45°/s	
WIFI	IEEE 802.11 b/g/n	
TF Card	Max 128G	
Auto Flip	NO	
WB	Indoor/Outdoor/Auto/Manual	
IR LED	6pcs Array 42Mil IR Led	
IR Distance	60 Meters	
Auto Control IR LED	Intelligent Matching Focal Length PWM Dimming Technology	
A-B Scan Point	Set Arbitrary	
A-B Scan Speed	User Programmable(Scan Speed 1-64 levels setting available)	
Preset Points	220pcs presets（dwell time 01-60s interval available）	
Guard Tours	3 groups(Max.16 points, dwell time user selectable)	
Software Control	IE, CMS, Management Platform, P2P	
Stream Code	Support Double Triple Steam Code	
Lens	18X(f=5.1mm~92mm);	
Video Compression	H.265+/H.265/H.264+/H.264 M-JPEG	
Audio Compression	G711，PCM	
Two Way Audio	Default With Microphone(Speaker Optional)	
Mobile Visit	Support Android、IOS	
Communications Protocol	TCP/IP，HTTP， NTP，IGMP， DHCP，UDP，SMTP，RTP，RTSP，ARP，DDNS，DNS，PPPoE，P2P，Onvif	
Compatible	Support Dahua/Hikvision/XM CMS/Seetong UC....Platform and NVR	
Network Security	HTTPS，802.1X、IP ADDRESS FILTERING	
Network Interface	1pcs 10/100BaseT WAN，RJ45 Network Port	
Quick Command	PELCO Instruction set	
Weatherproof	IP66	
OSD Menu	Support	
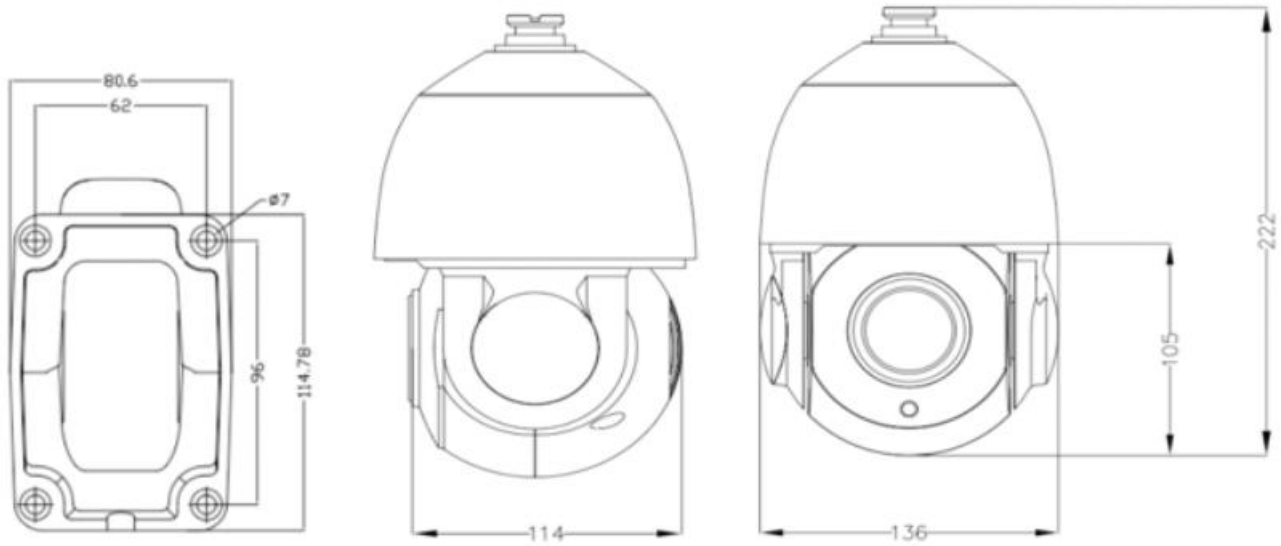
Preset Speed Settings	Support
Power on Mode	Power on /AB scan/horizontal scan/guard position/inspection group 1/ no action
S/N Ratio	≥50dB
Ambient Light Detection	IR illumination on 1-9 grades Selectable
Other Functions	2DNR,3DNR/DWDR/BLC/AGC/WB
Lightning Protection	Transient Voltage 6000V
APP	Camhi
CMS	HiP2P For PC
Package Size	W295mm*D280mm*H170mm
Weight	Net Weight 1.56KG/Gross Weight 2.24KG