
PIN OUT

USB3.0A Type		USB B 3.0A Type
1	USB_	1
2	DM	2
3	DP	3
4	Ground	4
5	SSRM_	8
6	SSRXP	9
7	SGND	7
8	SSTXM_	5
9	SSTXP	6
G	shielded	G




- Size:22. 5*45
- USB to USB
- Material:ABS
- Colour:White or Black

XJY-DMT-USB3.0-AF/BF-9L

PIN OUT

USB B 3.0A Type		USB3.0A Type
1	USB_	1
2	DM	2
3	DP	3
4	Ground	4
5	SSRM_	5
6	SSRXP	6
7	SGND	7
8	SSTXM_	8
9	SSTXP	9
G	shielded	G

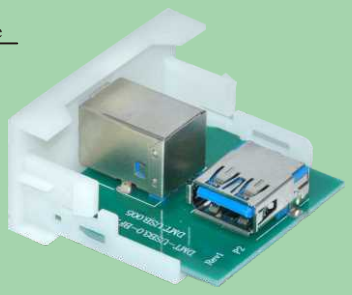

- Size:22. 5*45
- USB to USB
- Material:ABS
- Colour:White or Black

XJY-DMT-USB3.0-BF/AF-9L

Universal Serial Bus

Pin Out:

1 - V_{BUS}
2 - D-
3 - D+
4 - Ground
G - Shielded



- Size:22. 5*45
- Material:ABS
- Colour:White or Black


Screw to USB

XJY-DMT-USB2.0 A

PIN OUT

USB2. 0A Type RJ-45 Jack

1	V_{BUS}	1
2	D-	2
3	D+	3
4	Ground	4
G	Shielded	5



- Size:22. 5*45
- Material:ABS
- Colour:White or Black

RJ45 to USB

XJY-DMT-USB2.0 A-RJ45

USB 3.0 A

Pin Out:

1 - V_{BUS}	6 - RX+
2 - D-	7 - SGND
3 - D+	8 - TX-
4 - Ground	9 - TX+
5 - RX-	S - SHIELD



- Size:22. 5*45
- Material:ABS
- Colour:White or Black

Screw to USB 3.0

XJY-DMT-USB3.0 A

PIN OUT

HDMI Type A Pin Out

1	V_{BUS}	1
2	D-	2
3	D+	3
4	Ground	4
G	Shielded	G



22. 5×45

XJY-DMT-HDMI-F/F-9

G-1	1	TMDS Data 2+
	2	TMDS Data 2 shield
	3	TMDS Data 2-
G-2	4	TMDS Data 1+
	5	TMDS Data 1 shield
	6	TMDS Data 1-
G-3	7	TMDS Data 0+
	8	TMDS Data 0 shield
	9	TMDS Data 0-
G-4	10	TMDS Clock+
	11	TMDS Clock shield
	12	TMDS Clock-
	13	CEC
	14	Reserved(N.C. on device)
	15	SCL(DDC clock line)
	16	SDA(DDC date lines)
	17	DDC/CEC Ground
	18	+5V Power
	19	Hot plug detect
	GND	Ground


HDMI Type A Pin Out



22. 5×45

XJY-DMT-HDMI-F/F-18

1	1	11	11
2	2	12	12
3	3	13	13
4	4	14	14
5	5	15	15
6	6	16	16
7	7	17	17
8	8	18	18
9	9	19	19
10	10	SHELL	SHELL



22. 5×45

XJY-HDMI-38