

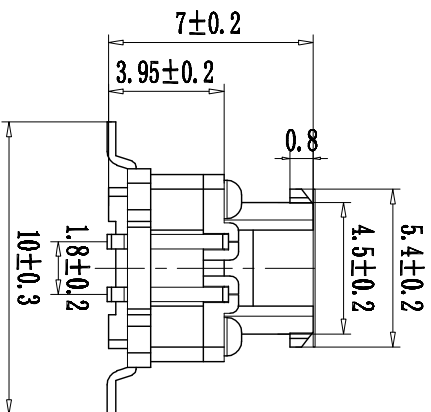


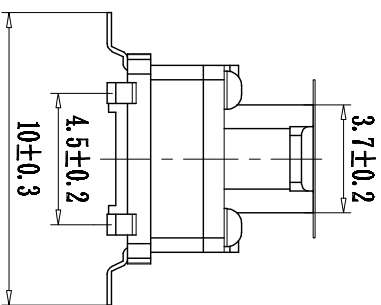



元件面孔位图

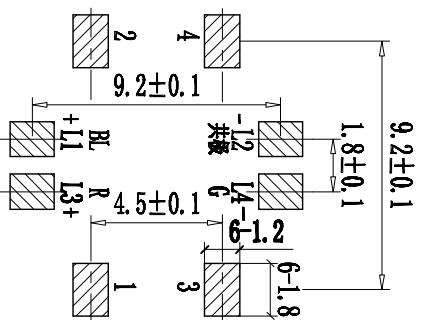

P.C.B LAYOUT

SPECIFICATION

1. Rating : DC 30V 30mA.
2. Contact resistance: $\leq 100\text{m}\Omega$.
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V).
4. Withstanding voltage: 250VAC.
5. Operating Force: $160 \pm 50\text{gf} / 250 \pm 80\text{gf}$
6. Travel : $0.25 \pm 0.1\text{mm}$.
7. Life test: 10,000 cycles.
8. Operation temperature range: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.

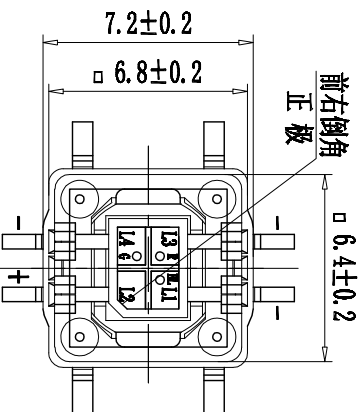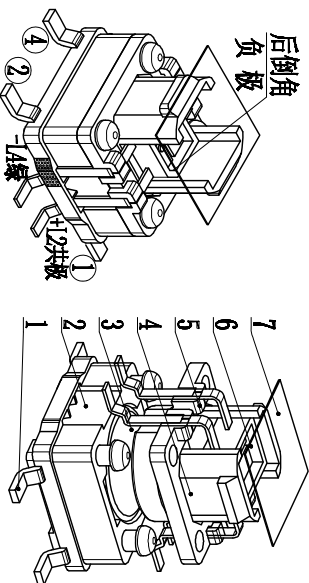

					TOLERANCE									
					UNLESS SPECIFIED									
7	PLATE			1	YELLOW									
6	LED			1	CLEAR GREEN/RED/BLUE									
5	COVER			1	BLACK									
4	BUTTON			1	WHITE									
3	SRPING			1	Ag-PLATED									
2	BASE			1	BLACK									
1	HOOK			1	Ag-PLATED									
NO.	PART	NAME	MATERIAL	QTY	FINISHING									
<div><div><div>皓宇 HOOVA</div></div><div>DONGGUANG HAoyu ELECTRONICS CO., LTD</div><div>东莞市弘皓电子有限公司</div></div> <div><div>MODEL: TC-1196A-RGB-04 三色灯贴片</div><div>SCALE: 1:1</div><div>COMPLIANT</div></div> <div><div>UNIT : MM</div><div>ROHS</div><div>DWN</div></div> <div><div>CHK'D</div><div>BY</div><div>APPD</div></div> <div><div>PRO.AGL:</div><div></div><div></div><div>REV :A0</div></div>														