


DIN933 STANDARD

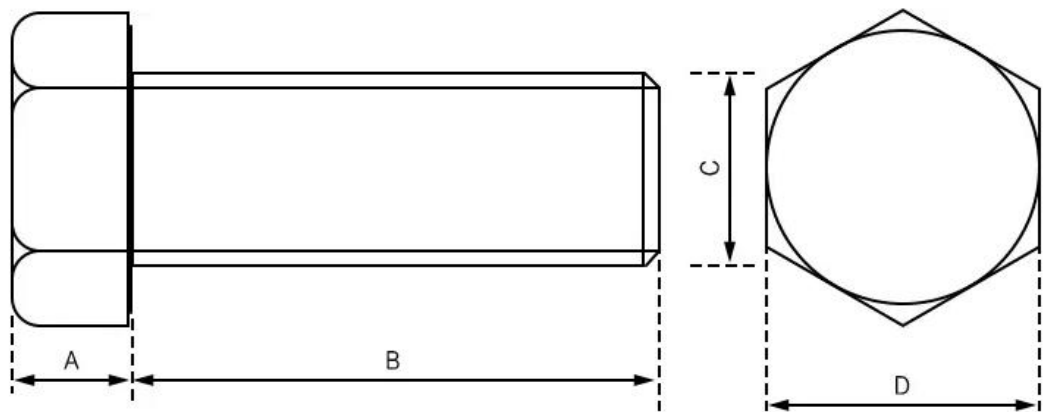

公称直径C	螺距p	A				D			长度B
		A级		B级		max	A级	B级	
		max	min	max	min		min		
M4	0.7	2.92	2.62	3	2.8	7	6.78	6.64	8-40
M5	0.8	3.65	3.35	3.74	3.26	8	7.78	7.64	8-65
M6	1	4.15	3.85	4.24	3.76	10	9.78	9.64	10-150
M7	1	4.95	4.65	5.04	4.56	11	10.73	10.57	10-150
M8	1.25	5.45	5.15	5.54	5.06	13	12.73	12.57	12-200
M10	1.5	6.56	6.22	6.69	6.11	17	16.73	16.57	16-200
M12	1.75	7.68	7.32	7.79	7.21	19	18.67	18.48	20-200
M14	2	8.98	8.62	9.09	8.51	22	21.67	21.16	25-200
M16	2	10.18	9.82	10.29	9.71	24	23.67	23.16	25-200
M18	2.5	11.72	11.28	11.85	11.15	27	26.67	26.15	30-150
M20	2.5	12.72	12.28	12.85	12.15	30	29.67	29.16	30-150
M22	2.5	14.22	14.35	14.35	13.65	32	31.61	31	30-150

螺纹	性能等级		
	A2-50	A2-70	A4-80
	破坏扭矩		
M1.6	0.15	0.2	0.24
M2	0.3	0.4	0.48
M2.5	0.6	0.9	0.96
M3	1.1	1.6	1.8
M4	2.7	3.8	4.3
M5	5.5	7.8	8.8
M6	9.3	13	15
M8	23	32	37
M10	46	65	74
M12	80	110	130
M16	210	290	330