

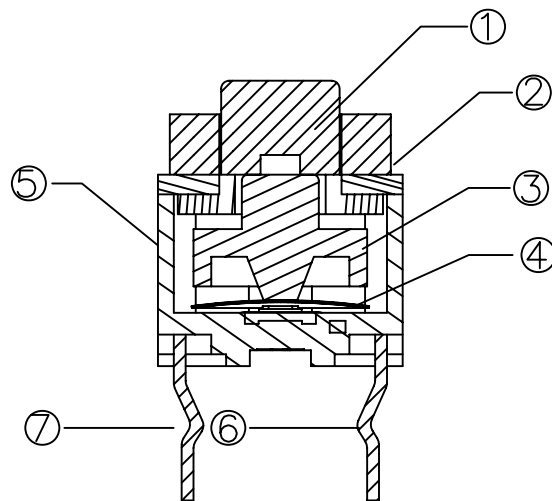
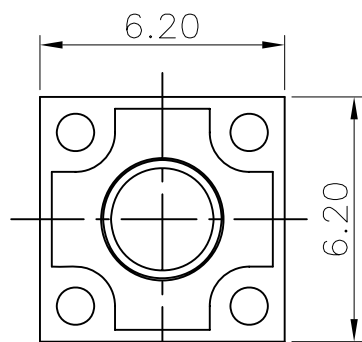


ABIDE BY WEEE & ROHS

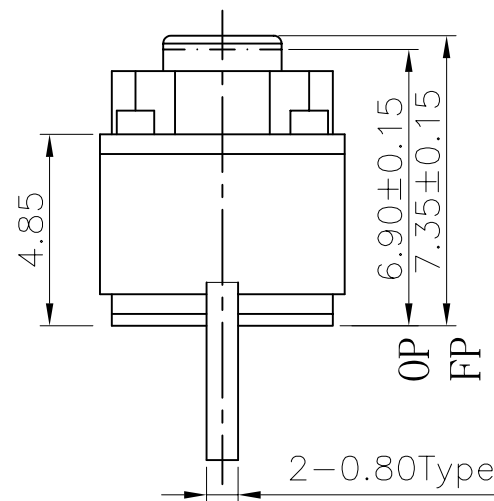


Specification :


1. Rating : DC12V 50mA
2. Contact Resistance : 100mΩ Max
3. Insulation Resistance : 100MΩ Min (DC250V)
4. Withstand Voltage : AC250V (50-60Hz) for 1 minute
5. Operation Force : 70 ± 15gf
6. Operation Position : 6.90 ± 0.15mm
7. Mechanical Life : 3,000,000 Cycles (min)

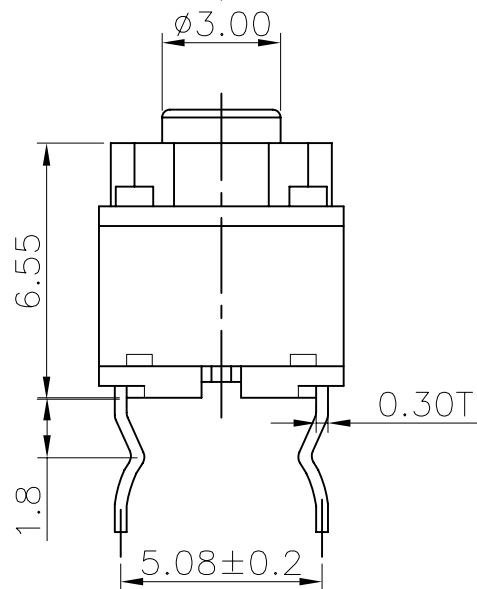

2-Ø1.10HOLE



PCB Layout(Pattern Side)



Circuit Diagram

⑦	Terminal	2	1	BRASS(0.3t)	Plating Silver	
⑥	Terminal	1	1	BRASS(0.3t)	Plating Silver	
⑤	Base		1	PA66	Black	
④	Contact		1	Copper-Silver Composite		
③	Rubber pad		1	Rubber	White	
②	Cover		1	PBT	Black	
①	Keystoke		1	POM	Black	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		 东莞市凯华电子有限公司 KAIHUA ELECTRONICS CO.,LTD			
DRAWN	Lv Panhao		Jun.07.2010					
CHECKED					TITLE:		Micro Switch (FP=7.3mm)	
APPROVALS					PART NO.		MI627301D03	
TOLERANCES ARE	30<L	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 		
	10<L≤30	±0.20						
	5<L≤10	±0.15						
	L≤5	±0.10						
			±2°	DRAWING NO.		SHEET 1 OF 1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			