



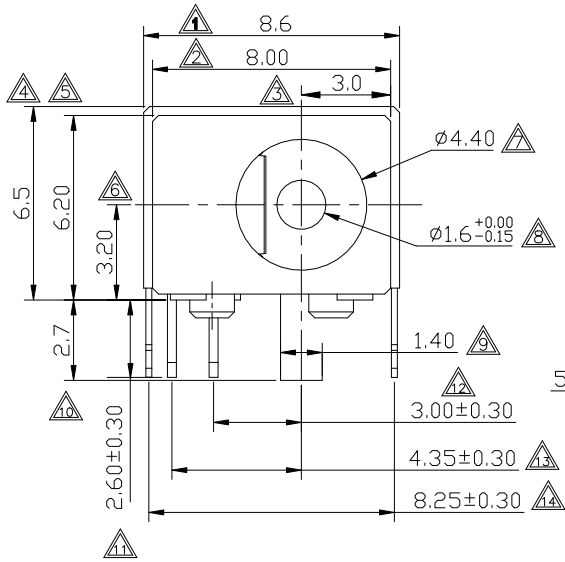


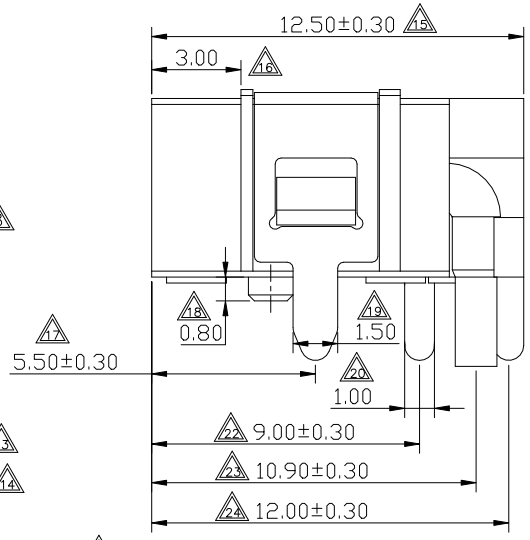


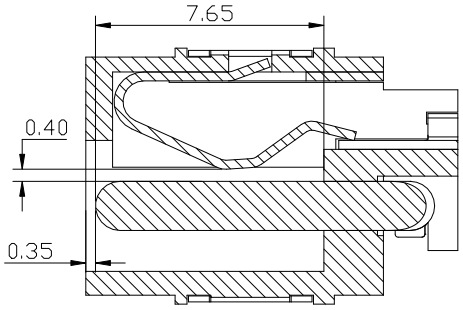

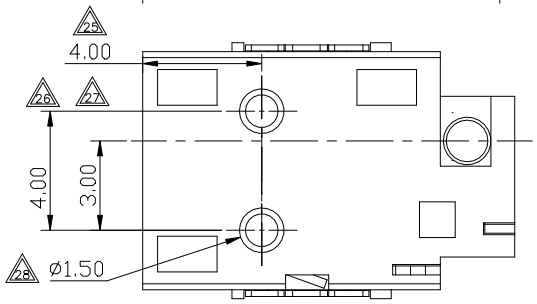


SECTION




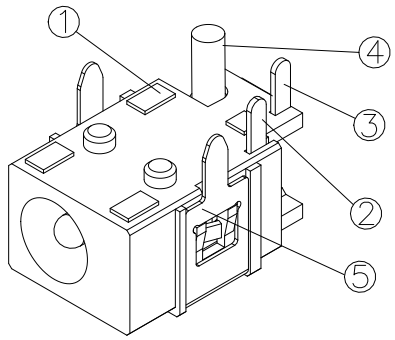

SCHEMATIC



P.C.B LAYOUT
TOP VIEW

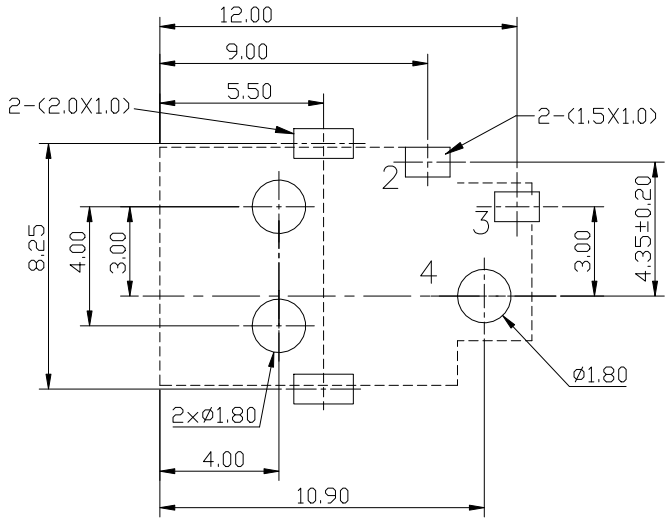

SPECIFICATION
1.Rating : DC 30V 1.0A;
2.Contact resistance: ≤0.03Ω;
3.Insulation resistance: ≥100MΩ (DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3-30N;
6.life test: 5,000 cycles.
7.Marked △ are important dimensions.

NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
5	SHELL	1	BRASS	———	Ni-Plating
4	PIN	1	BRASS	———	Sn-Plating
3	CURVE PIEVE	1	BRASS	———	Ag-Plating
2	SPRING	1	BRONZE	———	Ag-Plating
1	HOUSING	1	PA9T	———	———

ECN(DCN) NO	REV	DATE	DESCRIPTION	CHANGE	APPRO.
———	0	14'/08/02	NEW	JASON	Max.hu

DESIGN	Jason	14'/08/02
CHECK	Jason	14'/08/02
APPRO	Max.hu	14'/08/02

General	Angle
X ± 0.50	X °± 3°
X.X ± 0.30	X.X °± 2°
X.XX ± 0.20	X.XX °± 1°

GENERAL TOLERANCE
UNLESS OTHERWISE SPECIFIED

盛 聰 电 子 有 限 公 司
SHENG CONG ELECTRONIC CO.,LTD

CUSTORMER COPY

TITLE: DC-JACK

PART NO. DJ-D023W-4

PROJ: | SCALE: 1:1 | UNIT:mm | REV: A4 | SHEET: 1 OF 1

Pb Process Capable RoHS Compliant

Level-1 Controlled Substances are banned

Original: Design: Jason Check: Jason Appro: Max.hu Date: 14'/08/02