


产品说明:

- 额定温度: 70℃
- 额定电压: 300/300V
- 参考标准: GB5023.5-2008
- 导体使用绞合 0.5~0.75mm² 裸铜
- PVC 绝缘, 符合 ROHS 环保标准
- PVC 护套, 符合 ROHS 环保标准
- 通过 GB 18380 阻燃测试
- 使用标准绝缘厚度、易裁线、易剥皮
- 用于一般电子、电器电源连接线

PRODUCT DESCRIPTION

- Rated temperature: 70℃
- Rated voltage: 300/300V
- Reference standard: GB5023.5-2008
- Stranded bare copper conductor 0.5~0.75mm²
- PVC insulation, comply with ROHS environmental standard
- PVC jacket, comply with ROHS environmental standard
- Passes GB 18380 flame test
- Uniform insulation thickness to ensure easy stripping and cutting
- For general purpose use for power supply cord

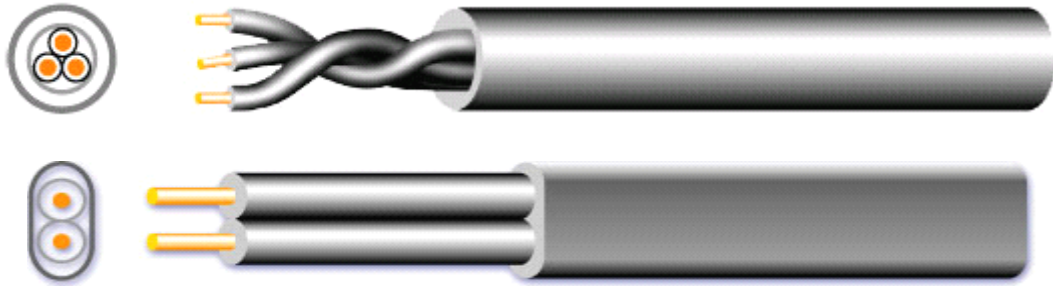

印字 MARKING

无

产品结构 CABLE CONSTRUCTION

导体 CONDUCTOR			绝缘 INSULATION			护套 JACKET		最大导体电阻 MAX.COND. RESISTANCE (Ω/km,20℃,DC)
面积 CROSS SECTION (mm ²)	构造 CONSTR- UCTION (No./mm)	外径 DIA. (mm)	芯数 (No.)	绝缘厚度 INSULATION THICKNESS (mm)	外径 O.D. (mm)	护套厚度 JACKET THICKNESS (mm)	外径 O.D. (mm)	
0.5	28/0.15	0.92	2	0.54	2.00	0.65	3.30×5.30	40.1
			2	0.54	2.00	0.65	5.30	
			3	0.54	2.00	0.65	5.60	
0.75	24/0.20	1.13	2	0.51	2.15	0.68	3.50×5.70	26.7
			2	0.51	2.15	0.65	5.60	
			3	0.51	2.15	0.63	5.90	