


Feature:

- Designed to Meet MIL-STD-1553 A/B & MIL-PRF-21038
- Common Mode Rejection (CMR) Greater Than 45dB
- Impedance Test Frequency from 75KHz to 1MHz
- Droop less than 20%
- Overshoot & ringing $\pm 1V$ Max
- Pulse width 2uS
- Interwinding insulation: 500Vrms,500Hz
- Operating temperature range: $-55^{\circ}C$ to $+125^{\circ}C$
- For Non-RoHS, reflow process must not cause the peak body temperature of the device to exceed $225^{\circ}C$ and must not expose the device to temperature above $183^{\circ}C$ for more than 90 seconds.
- For RoHS (+), reflow process must not cause the peak body temperature of the device to exceed $245^{\circ}C$ and must not expose the device to temperature above $217^{\circ}C$ for more than 150 seconds.


SPECIFICATIONS

Part No.	Turns ratio $\pm 3\%$	Terminals		DCR(Ω)Max		Impedance(Ω)Min	
		Pri	Sec	Pri	Sec	75KHz-249KHz	250KHz-1MHz
H2762	1:2.5	1-2,4-5	10-9,7-6	1.5	3.5	3000	4000

MECHANICAL

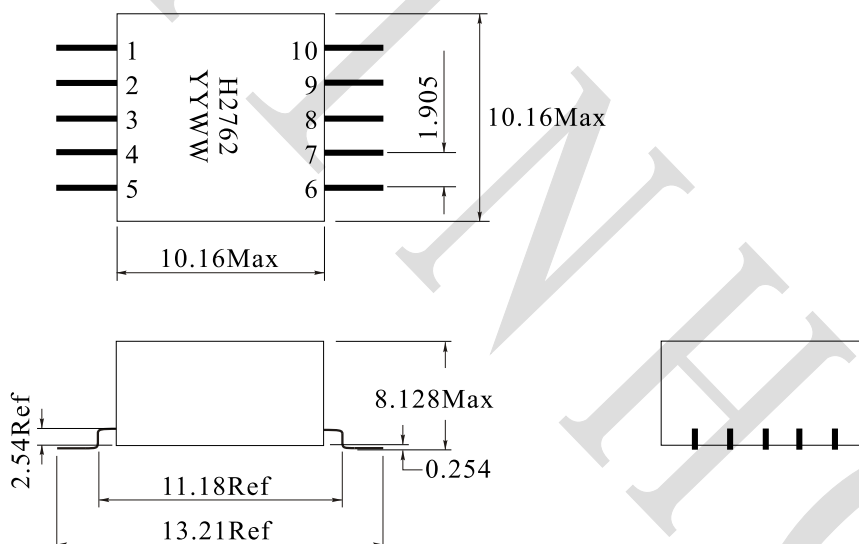

SCHEMATIC

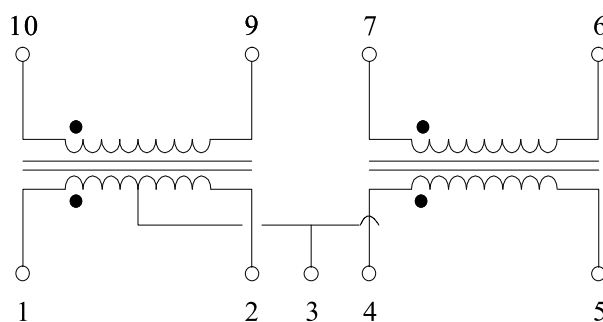

PRPARED BY		APPROVED BY	
------------	--	-------------	--

www.shinhom.com

NO.8,YanTa Northern road,xi'anCity Shaanxi pro.china TEL:+86-29-87851838 FAX:+86-29-87851840 E-mail:sales@shinhom.com.cn