



CAD FILE:

SWITCHING CIRCUIT



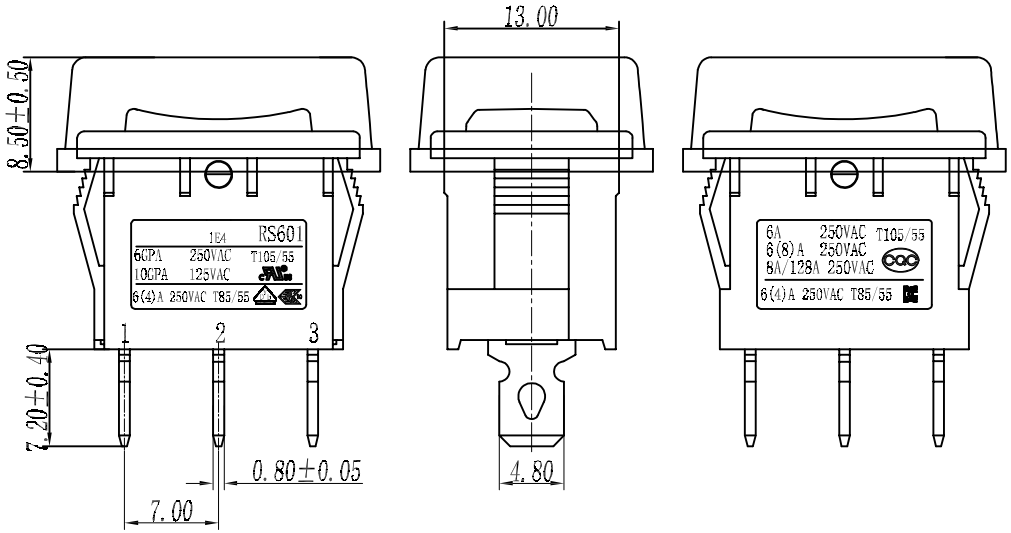

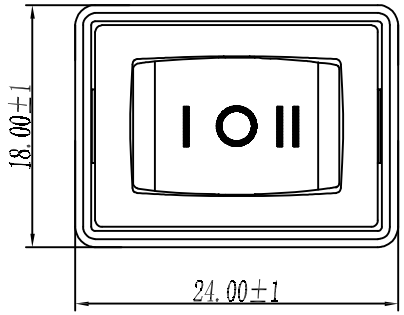



PANEL CUT-OUT		
Z	Y	X
0.70~1.25	12.90~13.10	18.9~19.1
1.25~2.00	12.90~13.10	19.1~19.2

NOTES:

1. Rating:
   - CQC 6A 250VAC
   - 6(8)A 250VAC
   - 8A/128A 250VAC T105/55
   - UL CUL 10GPA 125VAC
   - 6GPA 250VAC T105/55
   - VDE ENEC 6(4)A 250VAC T85/55
   - KC 6(4)A 250VAC T85/55
2. Circuit Diagram:3P ON-OFF-ON
3. Terminal Strength:≥80N
4. Electrical life:≥10000 cycles
5. Withstand Voltage:
   - Between all terminals:1500VAC 1min
   - Between terminals to Base:3000VAC 1min
   - Leakage Current:1mA
6. Current resistance:≤50mΩ (initial)
7. Insulation resistance:≥100MΩ
8. Body Materil:NYLON 66 94V-2~0

NO.	DESCRIPTION	MATERIAL	QTY	PLATING
8				
7				
6				
5	PICOT	BRASS	1	Ag PLATED
4	BASE	PA66	1	BLACK
3	SPRING	素碳钢丝	1	
2	CONTACT	BRASS	1	Ag PLATED
1	TERMINAL	BRASS	1	Sn PLATED

TOLERANCE UNLESS SPECIFIED

WITHIN 1.5: ±0.2mm
OVER 1.5: ±0.4mm
ANGLES: ±2°

ISSUE	DATE	DESCRIPTIONS	APPD.

TITLE:翘板开关

UNIT:mm

DRWG. NO.:

MODEL NO:RS601B-1030041BB-3A

SCALE:4:1

DWN	YINCONG
CHK'D	ZHENGZHIHUI
APPD.	LIUSANJUN

DONGGUAN JINBAOLI ELECTRONICS CO.,LTD