




RoHS COMPLIANT

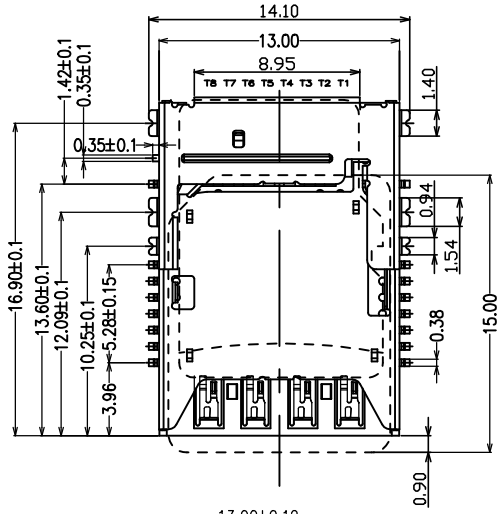


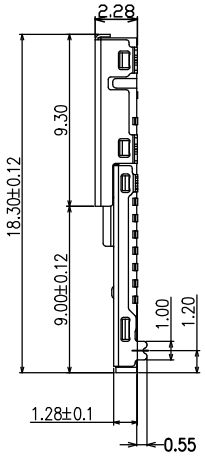

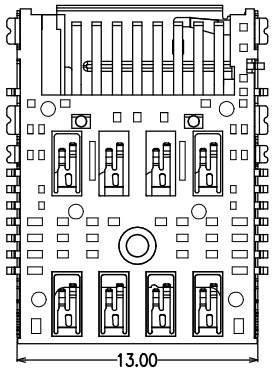




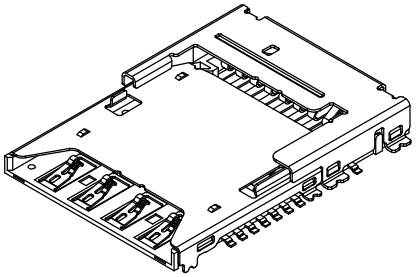

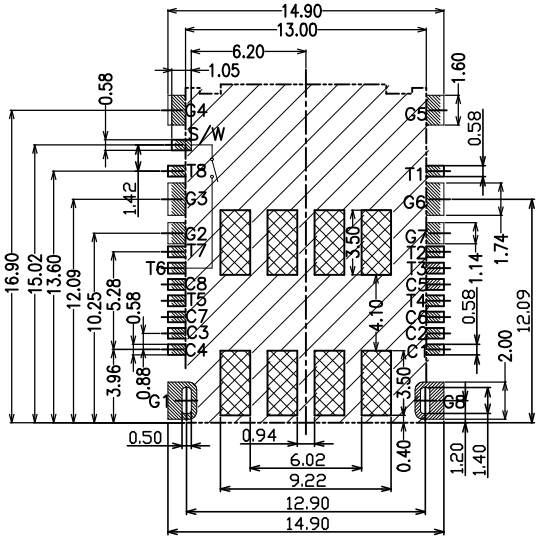

NO PATTERN AREA
NO CIRCUIT AREA
SOLDER AREA

P.C.B LAYOUT
(TOLERANCE±0.05)

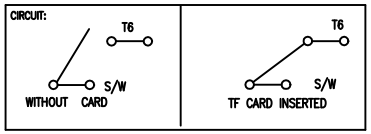

TF CARD PIN ASSIGNMENT

PIN NO.	PIN ASSIGNMENT
T1	DAT2
T2	CD/DAT3 [2]
T3	CMD
T4	VDD
T5	CLK
T6	VSS
T7	DAT0
T8	DAT1

SIM pin assignment	
	Name
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

NOTE:
MATERIAL AND FINISH
1.HOUSING:LCP,
UL 94V-0 , COLOR:WHITE
2.CONTACT:COPPER ALLOY
GOLD FLASH PLATING ON CONTACT AREA,
GOLD FLASH PLATING ON SOLDER TAILS
50u" NICKEL UNDER PLATING OVER ALL
3.SHELL:SUS304-3/4H
40u" NICKEL UNDER PLATING OVER ALL

MECHANICAL CHARACTERISTICS
1.Insertion Force:2.0Kgf Max
2.Withdrawal Force:0.1Kgf Min
3.Durability:5000 CYCLES MIN

SPECIFICATIONS :
1.Current rating:1.0A AC/DC
2.Contact resistance:100mΩ MAX
3.Insulation resistance:500MΩ MIN
4.Operating temperature:-20℃~65℃

M&T
High quality connectors

MTCONN ELECTRONICS CO.,LTD

DIM	TOL	DEC	TOL
X.	±0.50	X.°	±2°
X.X	±0.35	X.X°	±2°
X.XX	±0.25	X.XX°	±--
X.XXX	±0.15	X.XXX°	±--

DRWN: SAM	2017-02-08	PART NO.: MTSM05-000GW0-11A65
CHKD: ALAN	2017-02-08	TITLE: SIM+TF Card socket
APPD: WILLIAM	2017-02-08	DRAWING NO.: MTSM05-000GW0-11A65
SHEET: 1/1		UNIT: mm / SCALE: N/A / SIZE: A4 / REV: B