TECHNICAL SPECIFICATION

MODEL NO.:APMS-75-24 **DOCUMENT NO.:_____**

CUSTOMER NO.:_____ **DATA.:_____**

CHANGZHOU AMCFLEX TECHNOLOGY CO LTD
ADD: NO8, HUASHAN ROAD, XINBEI AREA, CHANGZHOU, JIANGSU, CHINA
TEL: 0086 519 69682537 FAX: 0086 519 68693467
Email: info@amcflex.com www.amcflex.com

APMS-75 Series

75W Single output with PFC function



- Constant Voltage Mode
- Built-in Active PFC Function, High efficiency up to 88%
- Protection: Over Current/Short Circuit
- Aluminum housing design with functional Ground
- IP67 full sealed for indoor and outdoor installations
- CLASS 2 Power Unit
- 5 Years warranty

TECHNICAL PARAMETERS

1. Output

Items	Specs	Unit	Conditions
Rated Output voltage	24	VDC	
Rated Output Current	3.125	A	
Rated Output Power	75	W	
Efficiency	⩾87.5 (Typical 88)	%	240VAC input, Rated Load
TC Max	90C°(Ta 55C°),230VAC, full load		
Line Regulation	±0.5%		
Load Regulation	±1.5%		
Voltage tolerance	±3%		
Rise time	⩽60	mS	25C° , full load
Power On Delay time	⩽2	S	200-240VAC, full load
Switch off Hold Up time	/	ms	Rated input voltage, rated load

2. Input

Items	Specs	Unit	Conditions
Rated Input voltage	200-277	VAC	
Input voltage range	176-305	VAC	
Input Frequency	47-63(Typical 50/60)	Hz	
Input Current Max	0.55	A	Vin=176Vac, Full Load
Inrush Current	≤20	A	220Vac, full load, 25C°
Power Factor	≥0.95		176~277Vac input, full load
THD	≤15	%	Vin=176~277Vac, full load

3. Protection

Current Limiting	110%-160%	A	Hi-CCUP Mode, Auto-recovery after fault condition is removed
Short circuit	Yes		Hi-CCUP Mode, Auto-recovery after fault condition is removed
Input Undervoltage protection	>80	V	

4. Temperature and others

Operating Temperature range	-40 to +80（Typical25）	C°	Refer to Derating Curve
Storage Temperature range	-45 to +80（Typical25	C°	
Humidity	10 ~ 95	%	NON-Condensing
Altitude	0 ~ 5000	M	Altitude Over 2000 meters, 1.5% derating for every 100 meters increase
Waterproof Level	IP67		
Cooling method	Air convection		
Temperature Coefficient	0.03%/C° (0-60C°)		
Vibration	10-500Hz, 5G 12min./1cycle, period for 72 min, each along X.Y. Z axes		

5. Safety & EMC Standards

Safety standard	UL8750, IEC/EN61347-1,EN61347-2-13,EN62368, GB19510.1,GB19510.14, IP67 Approved	
Withstand voltage	I/P-O/P	3000Vac 10mA (Max)
	I/P-FG	1500Vac 10mA (Max)
	O/P-FG	500Vac 10mA (Max)
Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25C°/ 70% RH	
Leakage Current	< 0.75mA	240Vac/60Hz

EMI

Conducted	EN55015(CISPR15), GB17743
Radiated	EN55015(CISPR15), GB17743
Harmonic Current	EN61000-3-2 , Class C @load≥50%

EMS


ESD	EN61000-4-2, 8KV air ; Level 2, 4KV contact
Radiated	EN61000-4-3
EFT/Burst	EN61000-4-4
Surge	EN61000-4-5, 4KV/Line-Line 6KV/Line-Earth
Conducted	EN61000-4-6
EN61547, Electromagnetic Immunity Requirements applies to lighting Equipment	

Others

MTBF	200Khours, MIL-HDBK-217F (25C°)
Dimension	115(L)*66.2 (W)*37(H)
Packing	0.41Kg;24pcs/ 10.5Kg/0.026CBM


6. Mechanical Mounting

DIMENSION	115(L)*66.2 (W)*37(H) mm		
Input Cable	AC/N(Blue) AC/L(Brown) FG(Green/Yellow)	VDE 17AWGx3C & 3x1.0mm^2	250±20mm Length
Output Cable	V+(RED)/Brown, V-(BLACK)/Blue	VDE 17AWGx2C & 2x1.0mm^2	250±20mm Length

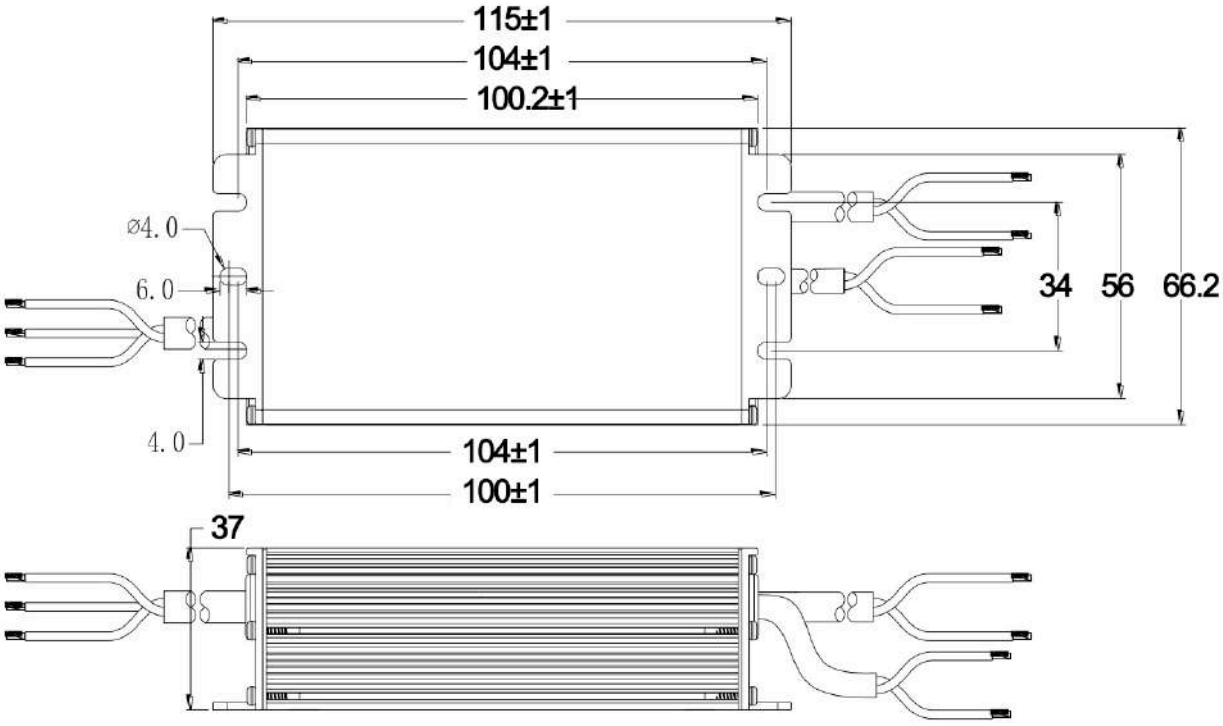


7. Characteristics & Derating


OUTPUT LOAD vs TEMPERATURE

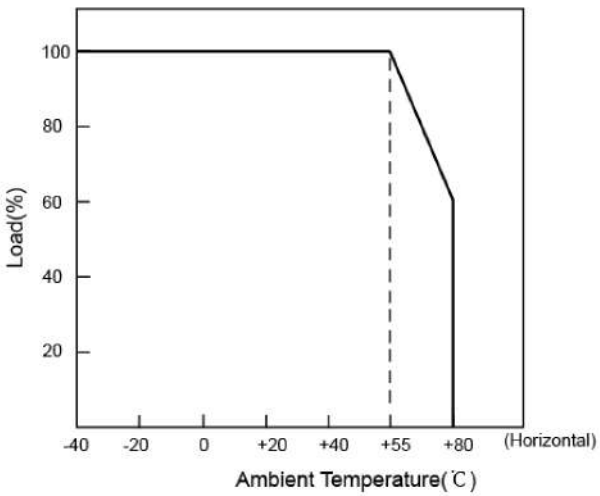


OUTPUT LOAD vs Tcase

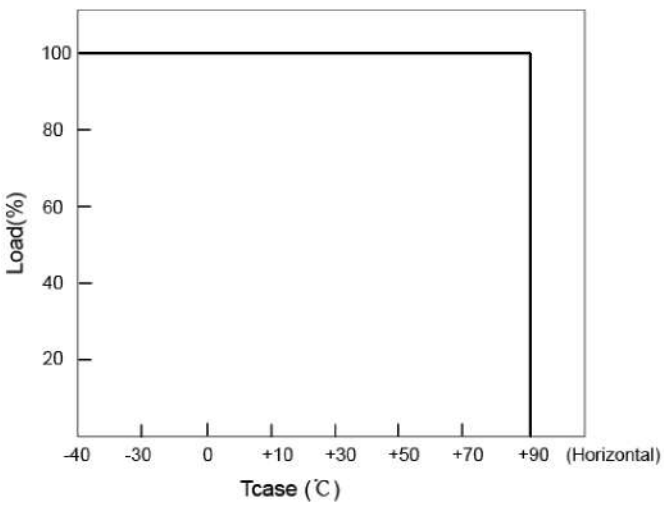


STATIC CHARACTERISTIC

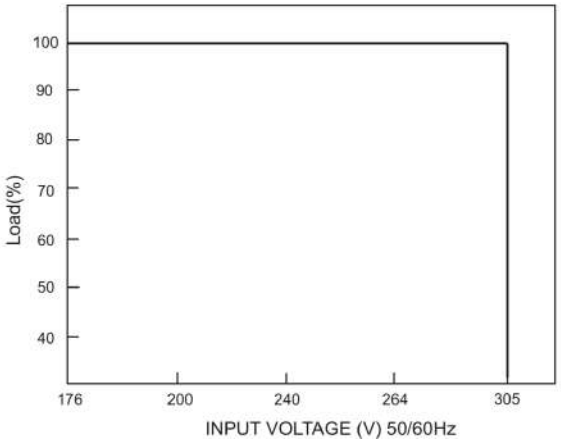

LIFE TIME

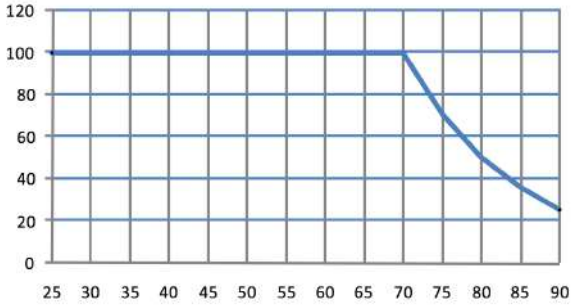

8. Product Label

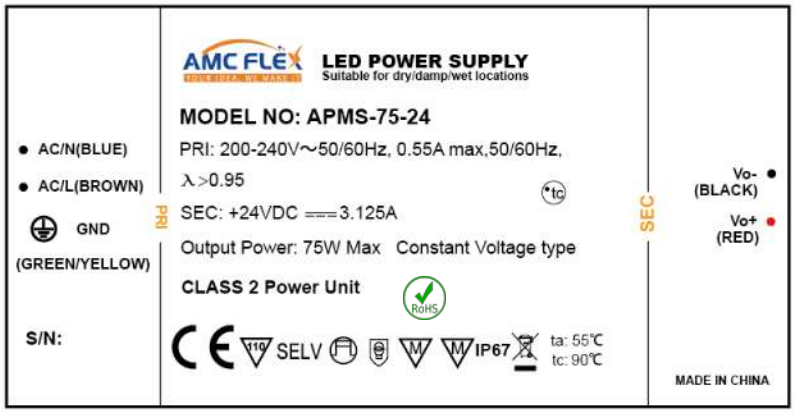

9. Installation Manuel & Caution

(1).Before commencing any installation or maintenance work, please disconnect the power supply from the utility. Ensure that it cannot be re-connected inadvertently.
(2). Keep proper ventilation around the unit and do not put any object on it. 15-20cm clearance must be kept when the adjacent device is a heat source
(3).Operating under high ambient temperature may cause the internal component temperature and will require a de-rating in output load
(4).Install in wet condition need use waterproof connectors, make sure there is no space between the unit and lighting fixtures.
(5). Output current and output wattage must not exceed the rated values on the specifications
(6).Wiring
Connect the ACL wire (Brown) of the LED power supply to Live (black or brown).
Connect the ACN wire (Blue) of the LED power supply to Neutral (white or blue)
(7) . Risk of electrical shock and energy hazard. All failure should be examined by a qualified technician. Please do not remove the case of the power supply by yourself!
(8). Can' t be installed under water or buried in soil directly
(9). Please do not install LED power supplies in places with high ambient temperature or close to fire source
(10). The FG (⏚) must be well connected to PE(protective earth)
(11). If the external flexible cable or cord of this switching power supply is damaged, it shall be exclusively replaced by the manufacturer or similar qualified person in order to avoid a hazard.