



Shenzhen ELEBAO Technology Co.,Ltd

Experts in Android TV boxes, Intel mini PCs, digital signage and AV products


Add: 6F , Tower A , Zhihuichuangxin Certer Bldg, Qianjin Road, Xixiang, Bao'an District, Shenzhen, 518126 China

Email:selina@elebaotec.com Contact: MsSelina WhatsApp/Cell :+86 15889676443 Skype:selinasong3@gmail.com

www.elebaotec.com

AM02 AMD Ryzen Mini PC

Photo

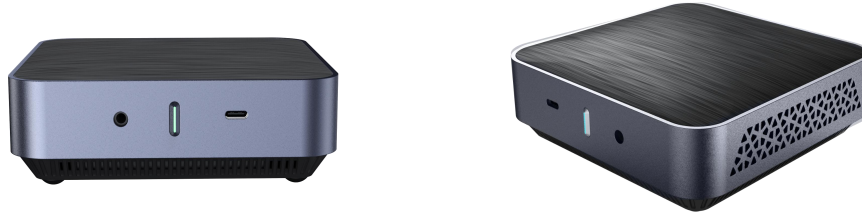

Processor	CPU	AMD Ryzen mobile processors, 300U, 3300U, and 3500U
	BIOS	AMI 8MB UEFI BIOS
	Chipset	SOC
Memory	Type	2 * DDR4
	Max Size	max support 64GB
Graphics	GPU	Radeon™ Vega 10/8/6/3 Display core
Network	Controller #1	RTL8111H/G
	Interface	1 x RJ45 1 GbE
	wifi	M.2 802.11 a, b/g, n, ac,ax. Support Bluetooth
I/O	USB	4 x USB3.0, 1 x TYPEC, support USB2.0/USB3.0
	Display Port	1 x HDMI, 1 x DP
	LAN	1 x RJ45 1 GbE
	Audio	1 x 3.5MM MIC+Audio
Storage	M.2 SSD PCIE	1 x M.2 2280 for NVMe &sata SSD,MAX to 2TB
Operation System	Windows	Windows 10 (64 bit)
	Linux	Supported (Optional)
Power	Power Type	DC-In
	Power Adapter	12V AC adapter(ϕ 5.5mm power connector)
	Fan	Built in non-noise Fan
Environment	Environment	Operating Temp 0°C to 50°C, Storage Temp -20°C to 60°C