


UL1185

BORT cable

RoHS & REACH compliant

环保引领未来

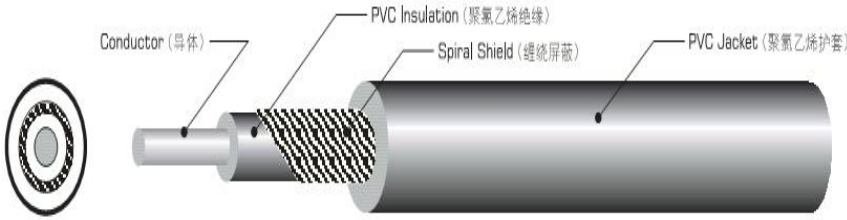

产品说明

PRODUCT DESCRIPTION

All our wires and cables are made of 99.99% pure oxygen free copper and high quality PVC which comply with the European Union RoHS environmental protection instruction.

- ★ Rated temperature: 105°C
- ★ Rated voltage: 600V
- ★ Reference standard: UL758
- ★ Solid or strand, tinned or bare copper conductor 8~2AWG
- ★ PVC insulation, comply with ROHS environmental standard

Application: internal wire of electrical equipment

- ★ 额定温度: 80°C
- ★ 额定电压: 300V
- ★ 执行标准: UL758, UL1581, C22.2
- ★ 导体使用单根或绞合镀锡或裸铜丝
- ★ 聚氯乙烯绝缘
- ★ 镀锡或裸铜丝缠绕屏蔽
- ★ 聚氯乙烯护套
- ★ 通过UL VW-1以及CSA FT1垂直燃烧测试
- ★ 绝缘厚度均匀 易剥 易裁
- ★ 用于广播, 视听设备, 计算机线等

Conductor			Insulation		
AWG	NO. of Cond/mm	Nom. Dia.	Jacket Thick.	Outside Thick.	Maximum Resistance at 20°C
		mm			
8	7/24/0.254	4.31	1.64	7.59	2.37
6	7/38/0.254	5.45	1.64	8.73	1.49
4	7/60/0.254	6.81	1.64	10.09	0.947
2	19/35/0.254	8.67	1.64	11.95	0.60

博尔特（漳州）电缆有限公司